




Filo nervato, liscio e ritorto in bobina

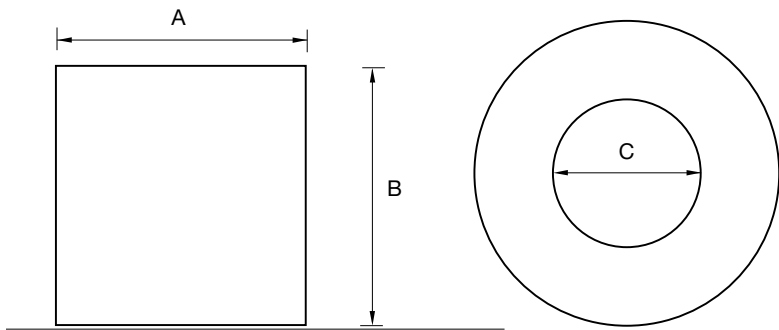

Bobine Coil Kg	A mm	B mm	C mm
500	750	600	600
1000	900	600	600
1500	950	600	600
2000	1050	600	600
3000	1150	750	600
4000	1150	1000	600
5000	1250	1000	600




Filo liscio / *Smooth Wire*
Ø (3 ÷ 12 mm)




Filo ritorto / *Twisted Wire*
Ø (3,5 ÷ 8 mm)

B450C




Filo nervato / *Ribbed wire*
Ø (6 ÷ 16 mm)

B450A



Filo nervato / *Ribbed wire*
Ø (5 ÷ 10 mm)

B500A



Filo nervato / *Ribbed wire*
Ø (5 ÷ 12 mm)

