


Tableau du fil en bobine

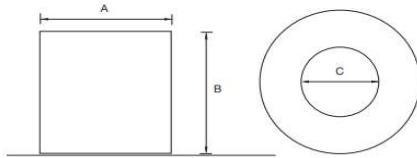

Ø	Qualité	Poids bobines (tonnes)	A (cm)	B (cm)	C (cm)
4	cranté	1,2	105	60	60
5	B500A	2	105	60	60
5	lisse	2	105	60	60
6	B500A	2,4	105	80	60
6	B500B	2	100	60	60
6	lisse	2	100	80	60
6	lisse	5	125	90	60
7	B500A	2,4	105	80	60
7	lisse	2	100	80	60
7,2	lisse	5	125	90	60
8	B500A/B	2,4	105	80	60
8	B500B	4,8	130	90	60
9	B500B	3	110	80	60
10	B500B	2,4	105	80	60
10	B500B	4,8	130	90	60
10	lisse	3	110	80	60
12	B500B	2,4	105	80	60
12	B500B	4,8	130	90	60
14	B500B	2,4	105	80	60
14	B500B	4,8	130	90	60
16	B500B	2,4	105	80	60
16	B500B	4,8	130	90	60